
DATA SHEET


CHERRY PIPES

300mm Twin Wall Filter Pipe


Pipe Wall Profile

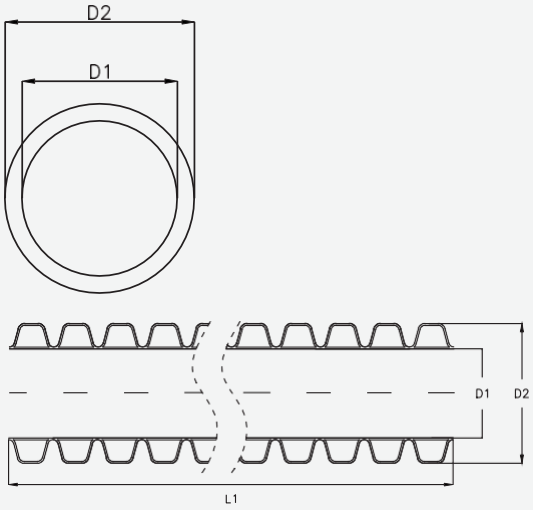

Pipe Wall Cross-section

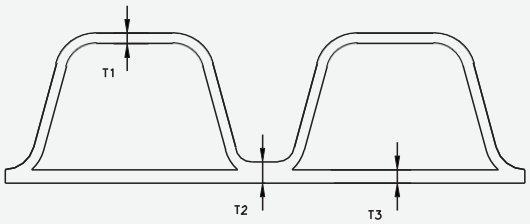

Perforation Patterns

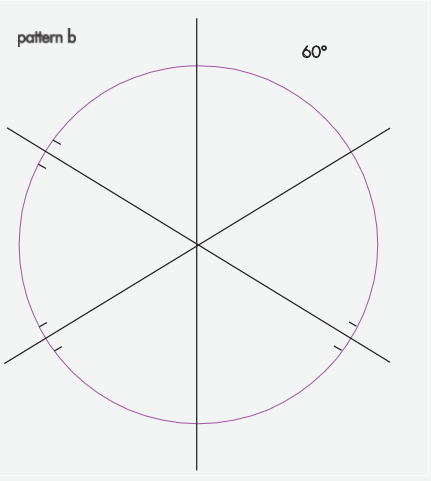

Dimensions

d_1	Inside Diameter	300 mm
d_2	Outside Diameter	354 mm
L1	Length	6000 mm

Design Values

Ring Stiffness	> 6 KN/m²
Creep Ratio	< 4
Life Span	50 Years

Wall Thickness

Location		MIN (mm)
T1	Crest Wall	1.6
T2	Double Wall	3.0
T3	Liner Wall	1.3

Perforations

No. of slots per dwell	6
No. of Rows of Slots	6
No. of dwells per metre	25
Slot Length	20
Slot Width	2
Minimum Permeable area	6000
Perforation Pattern	B (every dwell)

Water Flow Characteristics

The Pipes will have normal characteristics associated with thermoplastic pipes. Full bore velocities are available from the table for Hydraulic Design of Pipes, Sewers and Channels, Volume 2, 7th Edition by H R Wallingford and D I H Barr. Appropriate values are based on the Colebrook-White equation.

BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 07/H130

KM557607

bsi. ISO 9001:2015 Quality Management

bsi. ISO 14001:2015 Environmental Management

SS300F2025 V2

00 44 (0)28 3885 3900
cherrypipes.com
sales@cherrypipes.com

12 Derryhirk Road
Dungannon, Co. Tyrone
BT71 6NH.
Northern Ireland