
DATA SHEET


# CHERRY PIPES

## 375/419mm Twin Wall Cable Duct

### Pipe Wall Profile

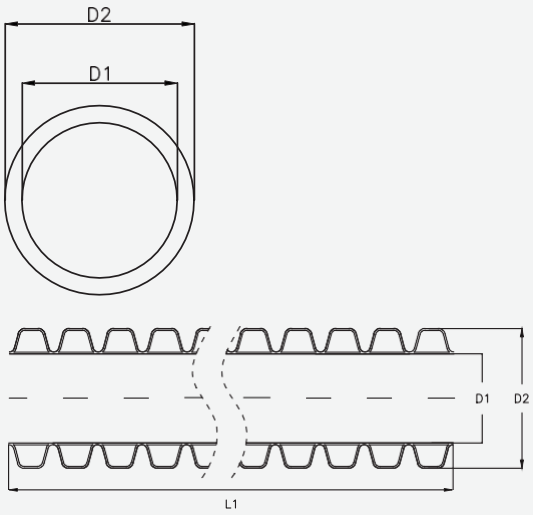


### Pipe Wall Cross-section

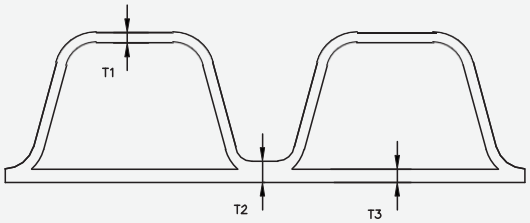


### Dimensions

| | | |
|---|---|---|
| $d_1$ | Inside Diameter | 375 mm |
| $d_2$ | Outside Diameter | 419 mm |
| L1 | Length | 6000 mm |

### Design Values

| | |
|---|---|
| Ring Stiffness | > 750N. |
| Creep Ratio | < 4 |
| Life Span | 50 Years |

### Wall Thickness

| Location | | MIN (mm) |
|---|---|---|
| T1 | Crest Wall | 2.0 |
| T2 | Double Wall | 3.6 |
| T3 | Liner Wall | 2.92 |

### Material & Specification

Manufactured using materials in accordance with EN 61386-2-4. HDPE (High Density Polyethylene).Manufactured in accordance with EN 61386-2-4: 2010

### Quality System & Inspection

Quality System and inspection procedures certified with ISO 9001:2015

### Bale Quantity & Colours

Bales: 5 No. x 6m lengths

Colours: Black, Purple, Orange, Green, Red, Blue, and yellow

00 44 (0)28 3885 3900
cherrypipes.com
sales@cherrypipes.com

12 Derryhirk Road
Dungannon, Co. Tyrone
BT71 6NH.
Northern Ireland