
DATA SHEET


CHERRY PIPES

750mm Twin Wall Carrier Pipe


Pipe Wall Profile

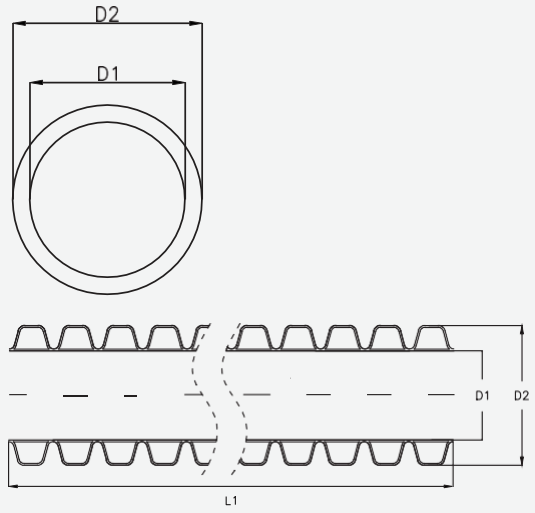

PipeWall Cross-section

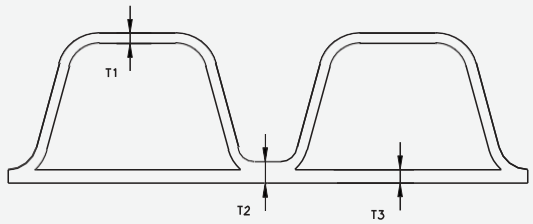

Spigot & Socket Details



Spigot & Socket Details	
Spigot ID	740
Spigot OD	815
Socket ID	822
Socket OD	852

Dimensions

d_1	Inside Diameter	740 mm
d_2	Outside Diameter	851 mm
L1	Length	6000 mm

Design Values

Ring Stiffness	> 6 KN/m²
Creep Ratio	< 4
Life Span	50 Years

Wall Thickness

Location		MIN (mm)
T1	Crest Wall	3.2
T2	Double Wall	7.1
T3	Liner Wall	3.1

Water Flow Characteristics

The Pipes will have normal characteristics associated with thermoplastic pipes. Full bore velocities are available from the table for Hydraulic Design of Pipes, Sewers and Channels, Volume 2, 7th Edition by H R Wallingford and D I H Barr. Appropriate values are based on the Colebrook-White equation.

00 44 (0)28 3885 3900
cherrypipes.com
sales@cherrypipes.com

12 Derryhirk Road
Dungannon, Co.Tyrone
BT71 6NH.
Northern Ireland

BBA APPROVAL INSPECTION TESTING CERTIFICATION
CERTIFICATE 07/H130